

i-Touch iiiC Technology

4 Wires Touch Panel Product Specification

Structure : PET-----Glare hard coating & Anti-Newton Ring
Glass-----Chemically strengthened ITO glass1.8mm
Dot Pitch-----5.0mm×5.0mm

Connector: FPC(4-Pin)

		Touch Panel Specification	Issue No.		
SET	Index		Page	1	
<p>1. Index 01</p> <p>2. Apply To Specification 02</p> <p>3. Optical Performance 03</p> <p>4. Electrical Performance 03</p> <p>5. Trust Test 04 05</p> <p>6. Appearance Inspection Standard 06</p> <p>7. Packing & Others 07</p>					
AMEND NO		i-Touch iiiC Technology	APPROVAL BY	CHECK BY	PREPARE BY
AMEND					
PUBLISH					

Touch Panel Specification		Issue No.	
SET	Apply To Specification	Page	2
<p>1. Suitability This specification suit analog resistance touch panel. Which used in LCD module.</p> <p>2. Apply To Specification 2.1 Surface Hardness: 3H 2.2 Optical Clarity: 80%↑ 2.3 Operating Temperature: -10°C ~ 60°C 2.4 Endurance Test strikes: Over 1 million 2.5 Operating Voltage: DC5V 2.6 Resistance: 200Ω ~ 900Ω 2.7 Linearity : <1.5% 2.8 Faceplate Surface: Anti-glare coating 2.9 Operation Pressure:15 ~ 70g 2.10 Storage Temperature: - 20°C ~ 70°C 2.11 Message Noise: 5 m sec ~ 15 m sec 2.12 Operating Current: 5mA ~ 25mA 2.13 Isolation Resistance: 20MΩ↑ @ DC 25V</p> <p>3. Dimension Size Refer diagram I</p>			
AMEND NO		i-Touch iiiC Technology	APPROVAL BY
AMEND			CHECK BY
PUBLISH			PREPARE BY

Touch Panel Specification		Issue No.	
SET	Optical & Electrical	Page	3
<p>4. Optical Performance Light transparency should keep above 80%↑ under the visible wave when the wave length is 550nm.</p> <p>5. Electrical Performance</p> <p>5.1 Connector Resistance $300\Omega < X \text{ Axis} < 900\Omega$ $200\Omega < Y \text{ Axis} < 800\Omega$</p> <p>5.2 Insulation Resistance $20M\Omega\uparrow @ DC 25V$</p> <p>5.3 Electrostatic Endurance No abnormal appearance after 10kv, 100 , 250PF electrostatic used</p> <p>5.4 Linearity X Axis : 1.5% ↓ Y Axis : 1.5% ↓</p> <p>5.5 Operating Voltage 3V ~ 12V DC</p> <p>5.6 Operating Current 5mA ~ 25mA °</p>			
AMEND NO		i-Touch iiiC Technology	APPROVAL BY
AMEND DATE			CHECK BY
PUBLISH			PREPARE BY

Touch Panel Specification		Issue No.			
SET	Reliability Test	Page	4		
<p>6. Environment Test</p> <p>6.1 High Temperature Test After putting panels at 70°C for 240 hours, then leaving for 24 hours at room temperature</p> <p>A. Resistance between leads 300Ω < X Axis < 900Ω 200Ω < Y Axis < 800Ω</p> <p>B. Linearity X Axis : 1.5%↓ Y Axis : 1.5%↓</p> <p>C. Insulation Resistance 20MO↑ @ DC25V</p> <p>6.2 Low Temperature Test After putting panels at -20°C for 240 hours, then leaving for 24 hours at room temperature.</p> <p>A. Resistance between leads 300Ω < X Axis < 900Ω 200Ω < Y Axis < 800Ω</p> <p>B. Linearity X Axis : 1.5%↓ Y Axis : 1.5%↓</p> <p>C. Insulation Resistance 20MO↑ @ DC25V</p> <p>6.3 Temperature and Humidity Test After putting panels at 40°C, 90%RH for 240 hours, then leaving for 24 hours at room temperature.</p> <p>A. Resistance between leads 300Ω < X Axis < 900Ω 250Ω < Y Axis < 800Ω</p> <p>B. Linearity X Axis : 1.5%↓ Y Axis : 1.5%↓</p> <p>C. Insulation Resistance 20MO↑ @ DC25V</p>					
AMEND NO		i-Touch iiiC Technology	APPROVAL BY	CHECK BY	PREPARE BY
AMEND					
PUBLISH					

	Touch Panel Specification	Issue No.	
SET	Reliability Test	Page	5

6.4 Repetition of High and Low Temperature and Test

After putting panels at the condition of -20°C for 30 minutes and then 70°C85%RH for 30 minutes and this process is repeated by 20 cycles , then leaving for 24 hours at room temperature.

A. Resistance between leads


300Ω < X Axis < 900Ω
 200Ω < Y Axis < 800Ω

B. Linearity

X Axis : 1.5%↓
 Y Axis : 1.5%↓

C. Insulation Resistance

20MΩ↑ @ DC25V

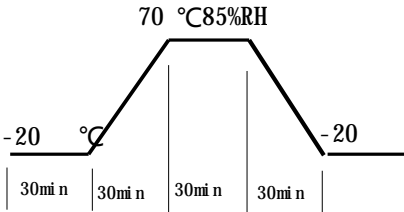

1

6.5 Punching Life

After punching 1,000,000 times with the R8.0 silicon rubber Force : 60g , Speed : 5/sec

A. Resistance between leads

300Ω < X Axis < 900Ω
 200Ω < Y Axis < 800Ω

B. Linearity


X Axis : 1.5%↓
 Y Axis : 1.5%↓

C. Insulation Resistance

20MΩ↑ @ DC25V

6.6 Impact Resistance

No damage when φ9mm steel ball is dropped on the surface from 30cm height at 1 time.

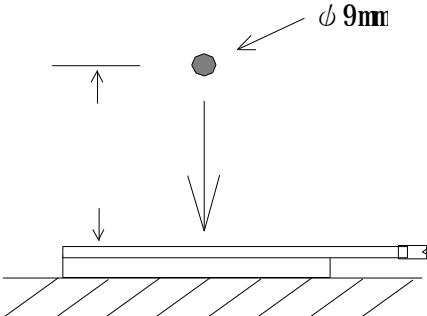


AMEND NO		i-Touch iiiC Technology	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					

	Touch Panel Specification	Issue No.	
SET	Appearance Inspection Standard	Page	6

7. Appearance

7.1 Inspection condition

- (A).The lightness of place: 500 LUX
- (B)The distance of eyeshot:30 CM(The panel must be checked under the light transparency condition.)
- (C)The angle of eyeshot: 60
- (D)The light source of place : natural sunlight.



7.2 Inspection Standard

Suitable in the visible area. Except dot space.

1.Spot, otherness	$\phi \leq 0.15\text{mm}$	Ignorance
	$0.15\text{mm} \leq \phi \leq 0.25\text{mm}$	≤ 2
	$\phi > 0.25\text{mm}$	NG
2. Scratch	$w \leq 0.05\text{mm}$ and $L \leq 2.0\text{mm}$	Ignorance
	$w \leq 0.05\text{mm}$ $2.0\text{mm} < L \leq 4.0\text{mm}$	2 or less & distance > 5mm
	$W > 0.05\text{mm}$ or $L > 4.0\text{mm}$	NG
3.Cicatrices (Line) L: Length W: Width	$W \leq 0.03\text{mm}$	Ignorance
	$L \leq 4\text{mm}$ & $0.03\text{mm} \leq W \leq 0.05\text{mm}$	≤ 2 2 line distance $\leq 10\text{mm}$
	$W > 0.05\text{mm}$	NG
4. Edge warp	Edge warp $\leq 3\text{mm}$	allowable
	Edge warp $\leq 2\text{mm}$	allowable

7.3 Quality inspection standard:

Adapt to AQL MIL-STD-105D

Samples inspection QTY: according to AQL MIL-STD-105D(Charter I)

Inspection Base: according to AQL MIL-STD-105D(Charter II)

- Broken seriously(othersness, scrape)0.01% --- Cr (Critical Defect)
- Obvious(othersness, scrape)0.65% ----- Ma(Major Defect)
- Not obvious(othersness, scrape)2.5% ----- Mi(Minor Defect)

AMEND NO		i-Touch iiiC Technology	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					

	Touch Panel Specification		Issue No.		
SET	Packing & Others		Page	7	
<p>8.Packing Detail</p> <p>8.1 Packing: Can't have otherness on panel. Pack with EPE material.</p> <p>8.2 Delivery: For Avoiding the badly affect to the product quality, shouldn't delivery in the situation of high humidity and unusually high or low temperature</p> <p>9.Others</p> <p>(1) If there is any question in specification , the decision depends on conferment between manufacturer and customer.</p> <p>(2) If there is any change in specification , can't actualize without document permit.</p> <p>(3) The specification content is different from the individual specification one, decision bases on the latter.</p>					
AMEND NO		i-Touch iiiC Technology	APPROVAL BY	CHECK BY	PREPARE BY
AMEND DATE					
PUBLISH					